

CAM-2222

8MP Lite IR Fixed-focal Eyeball Network Camera



- 8MP, 1/2.7" CMOS image sensor, low illuminance, high image definition
- Outputs max. 8MP (3840 × 2160) @15 fps, and supports 2688×1520 (2688 × 1520) @25/30 fps
- H.265 codec, high compression rate, ultra-low bit rate
- Built-in IR LED, max IR distance: 30 m
- ROI, SMART H.264/H.265, flexible coding, applicable to various bandwidth and storage environments
- Rotation mode, WDR, 3D DNR, HLC, BLC, digital watermarking, applicable to various monitoring scenes
- Intelligent detection: Intrusion, tripwire
- Abnormality detection: Motion detection, video tampering, no SD card, SD card full, SD card error, network disconnection, IP conflict, illegal access, voltage detection
- Supports max. 256 GB Micro SD card, built-in MIC
- 12V DC/PoE power support
- IP67 protection



System Overview

With upgraded H.265 encoding technology, Dahua Lite series network camera has efficient video encoding capacity, which saves bandwidth and storage space. This camera adopts the latest starlight technology and displays better color image in the condition of low illumination. It supports SD card storage, dust-proof function, waterproof function and vandal-proof function, complying to the standards of IP67 and IK10 (Supported by some select models).

Functions

Smart Codec

With advanced scene-adaptive rate control algorithm, Dahua smart encoding technology realizes the higher encoding efficiency than H.265 and H.264, provides high-quality video, and reduces the cost of storage and transmission.

WDR

With advanced Wide Dynamic Range (WDR) technology, Dahua network camera provides clear details in the environment of strong brightness contrast. The bright and dark area can get clear video even in high brightness environment or with backlight shadow.

Starlight

Dahua Starlight technology mainly applies to the environment of low illuminance, and it can provide clear colorful video. Even in the environment of ultra-low illuminance, the technology can guarantee the good image effect.

IVS

With advanced video algorithm, Dahua IVS technology supports intelligent functions, such as tripwire and intrusion.

Protection (IP67, wide voltage)

IP67: The camera passes a series of strict test on dust and soak. It has dust-proof function, and the enclosure can work normal after soaking in 1 m deep water for 30 minutes.

Wide voltage: The camera allows ±30% input voltage tolerance (wide voltage range), and it is widely applied to outdoor environment with instable voltage.

Technical Specification						
Camera						
Image Sensor		1/2.7" 8Megapixel progressive CMOS				
Effective Pixels		3840 (H) ×2160 (V)				
ROM		128 MB				
RAM		256 MB				
Scanning System		Progressive				
Electronic Shutter Speed		Auto/Manual 1/3 s–1/100,000 s				
Min. Illumination		0.009 Lux@F2.0				
IR Distance		30 m (98.43 ft)				
IR On/Off Control		Auto/Manual				
IR LEDs Number		2				
Pan/Tilt/Rotation Range		Pan: 0°–360° Tilt: 0°–78° Rotation: 0°–360°				
Lens						
Lens Type		Fixed-focal				
Mount Type		M12				
Focal Length		2.8 mm 3.6 mm				
Max. Aperture		F2.0 F2.0				
Field of View		2.8 mm: Pan 105° × Tilt 56° × Diagonal 125° 3.6 mm: Pan 87° × Tilt 47° × Diagonal 104°				
Iris Type		Fixed				
Close Focus Distance		2.8 mm: 1.0 m (3.3 ft) 3.6 mm: 1.9 m (6.2 ft)				
DORI Distance	Lens	Detect	Observe	Recognize	Identify	
	2.8 mm	74.7 m (245.1 ft)	29.9 m (98.1 ft)	14.9 m (48.9 ft)	7.5 m (24.6 ft)	
	3.6 mm	106.7 m (350.1 ft)	42.7 m (140.1 ft)	21.3 m (69.6 ft)	10.7 m (35.1 ft)	
Smart event						
General IVS Analytics		Tripwire; intrusion				
Video						
Video Compression		H.265; H.264; H.264B; MJPEG				
Smart Codec		Yes				
Video Frame Rate		Main stream: 3840 × 2160 (1 fps–15 fps) 2688 × 1520 (1 fps–25/30 fps) Sub stream: 704 × 576 (1 fps–25 fps) 704 × 480 (1 fps–30 fps)				
Stream Capability		2 streams				

Resolution	3840 × 2160 (3840 × 2160); 3072 × 2048 (3072 × 2048); 3072 ×1728 (3072 × 1728); 2592 × 1944 (2592 × 1944); 2688 × 1520 (2688 × 1520); 3M (2048 × 1536); 2304 × 1296 (2304 × 1296); 1080p (1920 × 1080); 1.3M (1280 × 960); 720p (1280 × 720); D1 (704 × 576/704 × 480); VGA (640 × 480); CIF (352 × 288/352 × 240)	
	Bit Rate Control	CBR/VBR
	Video Bit Rate	H.264: 32 Kbps–8192 Kbps H.265: 12 Kbps–8192 Kbps
	Day/Night	Auto(ICR)/Color/B/W
	BLC	Yes
	HLC	Yes
	WDR	120 dB
	White Balance	Auto/natural/street lamp/outdoor/manual/regional custom
	Gain Control	Auto/Manual
	Noise Reduction	3D DNR
Motion Detection	OFF/ON (4 areas, rectangular)	
Region of Interest(Rol)	Yes (4 areas)	
Smart IR	Yes	
Image Rotation	0°/90°/180°/270° (Supports 90°/270° with 2688 × 1520 resolution and lower.)	
Mirror	Yes	
Privacy Masking	4 areas	
Audio		
Built-in MIC	Yes	
Audio Compression	G.711A; G.711Mu; G.726; AAC	
Network		
Network	RJ-45 (10/100 Base-T)	
Protocol	IPv4; IPv6; HTTP; HTTPS; TCP; UDP; ARP; RTP ; RTSP; RTCP; RTMP; SMTP; FTP; SFTP; DHCP; DNS; DDNS; QoS; UPnP; NTP; Multicast; ICMP; IGMP; NFS; PPPoE; 802.1x; Bonjour	
Interoperability	ONVIF(Profile S/Profile G/Profile T); CGI; P2P; Milestone; Genetec	
User/Host	20	
Edge Storage	Dahua Cloud; FTP; SFTP; Micro SD Card (support max. 256 GB); NAS	
Browser	IE Chrome Firefox	
Management Software	Smart PSS; DSS; DMSS	
Mobile Phone	IOS; Android	
Certification		
Certifications	CE-LVD: EN60950-1 CE-EMC: Electromagnetic Compatibility Directive 2014/30/EU FCC: 47 CFR FCC Part 15, Subpart B	

Power


Power Supply	12V DC/PoE (802.3af)
Power Consumption	< 7.2W

Environment


Operating Conditions	−40°C to +55°C (−40°F to +131°F)/less than ≤ 95% RH
Storage Temperature	−40°C to +60°C (−40°F to +140°F)
Protection	IP67

Structure

Casing	Metal
Dimensions	100.9 mm × Φ109.9 mm (3.97" × Φ4.33")
Net Weight	0.48 kg (1.1 lb)
Gross Weight	0.65 kg (1.4 lb)

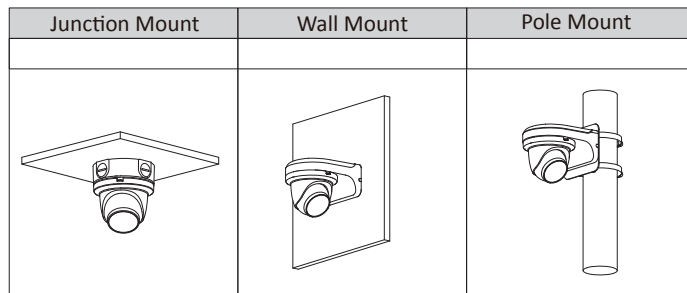

Dimensions (mm[inch])

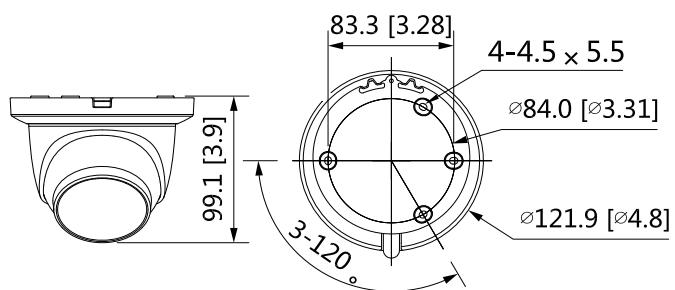

Accessories

Optional:



CAM-225
Junction
Box



CAM - 562
Wall Mount



CAM-215
Pole Mount